


Specifications/技术参数:

Electrical/电气特性:

Current Rating (额定电流): 1A
 Withstand Voltage (耐压值): 1000VAC for one minute
 Contact Resistance (接触电阻): 25mΩ max
 Insulation Resistance (绝缘电阻): 5000MΩ min
 Operating Temperature (工作温度): -40°C ~ +105°C




Physical/物理特性:

Insulator (塑胶本体): Glass Filled Polyester
 Flammability Rating (防火等级): UL 94V-0
 Contacts (接触件): Copper alloy
 Contacts plating (接触件电镀): Selective gold plating on surface contact area

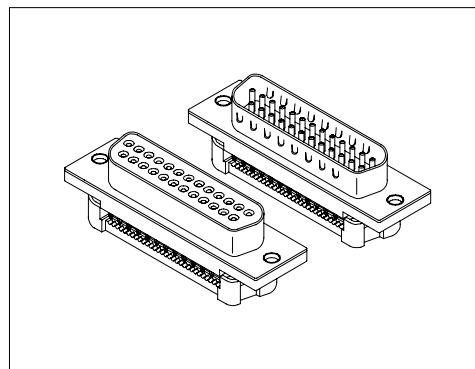

Dimension/尺寸: mm

Male/公针:


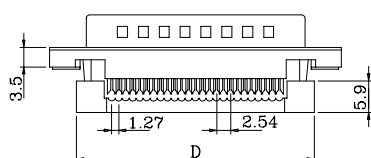
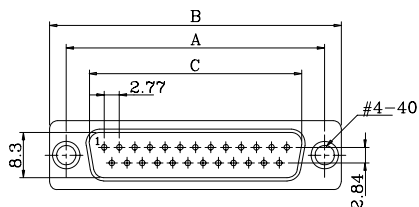


Strain Relief (Type-A)
压条 (A款)

Dimension/尺寸:

Poles	Dim A	Dim B	Dim C	Dim D
9	25.0	30.8	16.92	22.4
15	33.3	39.2	25.25	30.8
25	47.1	53.1	38.96	44.5
37	63.5	69.4	55.42	61.4

Female/母孔:

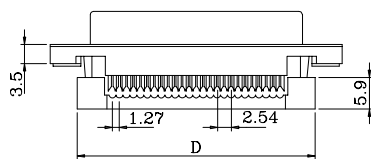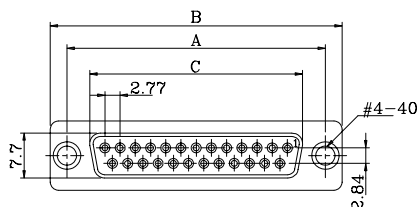


Strain Relief (Type-A)
压条 (A款)

Dimension/尺寸:

Poles	Dim A	Dim B	Dim C	Dim D
9	25.0	30.8	16.3	22.4
15	33.3	39.2	24.6	30.8
25	47.1	53.1	38.3	44.5
37	63.5	69.4	54.8	61.4

Mounting Options/安装选项:

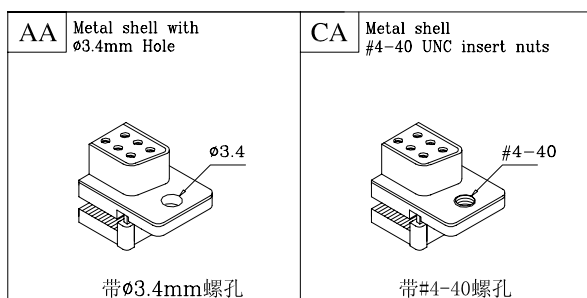

Ordering Code/订购型号:

1		2	3	4	5	6	7		
DML	-	15	F	S	-	CA	B	-	2

1. Series No./系列号:

DML

2. Poles/位数:

9、15、25、37

3. Contacts type/接触件类型:

M = Male(公针)

F = Female(母孔)

4. Contacts plating/接触件电镀:

S = Selective Gold(半金)

G = Gold flash(全金)

5. Mounting options/安装选项:

AA = Metal shell With ø3.4mm Holes

CA = Metal shell #4-40 UNC insert nuts

6. Strain relief type/压条类型:

A = Pin in (内扣型)

B = Pin out (外扣型)

7. Insulator color/胶体颜色:

2 = Blue(蓝色)

3 = Black(黑色)