


Specifications/技术参数:

Electrical/电气特性:






Current Rating (额定电流): 3A
 Withstand Voltage (耐压值): 1000VAC for one minute
 Contact Resistance (接触电阻): 20mΩ max
 Insulation Resistance (绝缘电阻): 5000MΩ min
 Operating Temperature (工作温度): -40°C ~ +105°C

Physical/物理特性:






Insulator (塑胶本体): Glass Filled Polyester
 Flammability Rating (防火等级): UL 94V-0
 Contacts (接触件): Copper alloy
 Contacts plating (接触件电镀): Selective gold plating on surface contact area

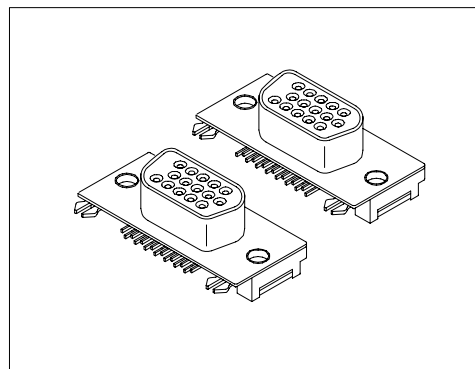

Dimension/尺寸: mm

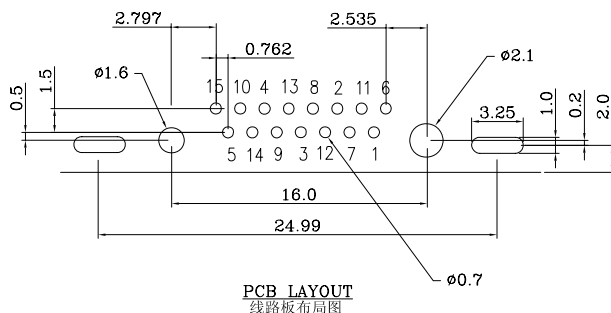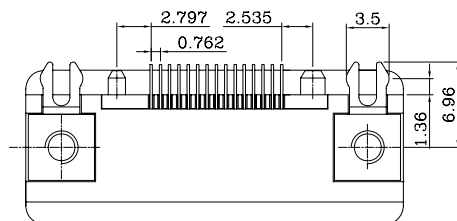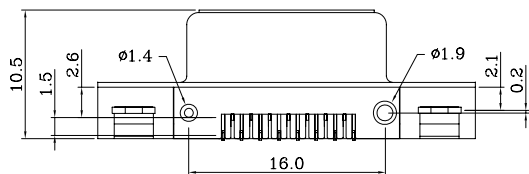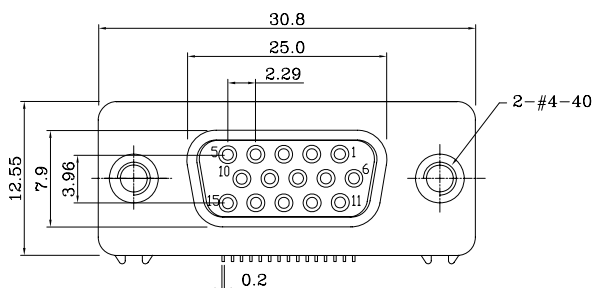


A Type (Front 7pin)
 A款 (前七后八)

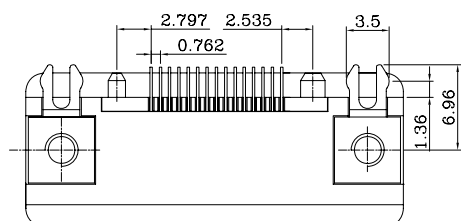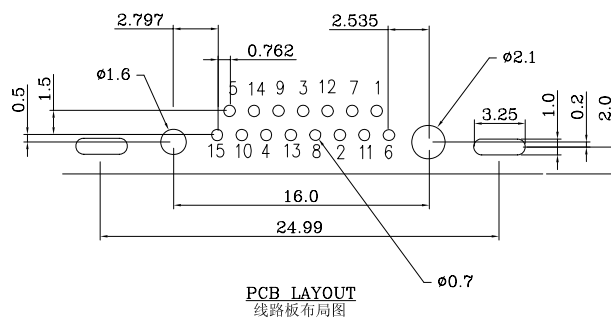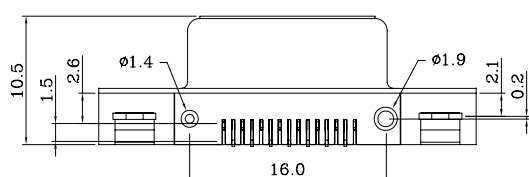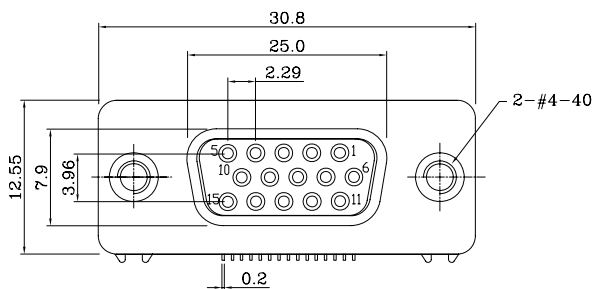

B Type (Front 8pin)
B款 (前八后七)

Ordering Code/订购型号:



1. Series No./系列号:

DMRSSH

2. Poles/位数:

15

3. Contacts type/接触件类型:

F = Female(母孔)

4. Contacts plating/接触件电镀:

S = Selective Gold(半金)

G = Gold flash(全金)

5. Mounting options/安装选项:

CAH = Riveted ground hooks with #4-40 UNC open
(后铆鱼叉, 带#4-40螺孔)

6. Insulator color/胶体颜色:

1 = White(白色) 2 = Blue(蓝色)

3 = Black(黑色) 4 = Grey(灰色)

7. Options/选项:

A = A Type Front 7pin(前七后八)

B = B Type Front 8pin(前八后七)