



6312 SERIES 1.25mm DIP LIF FFC/FPC Connectors


Specifications/技术参数:

Electrical/电气特性:

- Current Rating (额定电流): 0.5A
- Voltage Rating (额定电压): 50V
- Withstand Voltage (耐压值): 500VAC for one minute
- Contact Resistance (接触电阻): 30mΩ max
- Insulation Resistance (绝缘电阻): 500MΩ min
- Operating Temperature (工作温度): -25°C ~ +85°C

Physical/物理特性:

- Insulator (塑胶本体): Nylon46
- Flammability Rating (防火等级): UL 94V-0
- Contacts (接触件): Phosphor Bronze
- Contacts plating (接触件电镀): Tin-plated

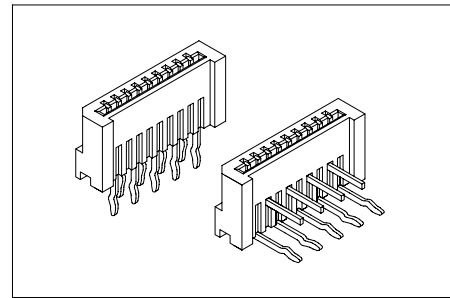


Dimension/尺寸: mm


$$A = 1.25 * \text{No. of Positions} - 1.25$$

$$B = 1.25 * \text{No. of Positions} + 1.35$$

$$C = 1.25 * \text{No. of Positions} + 3.55$$

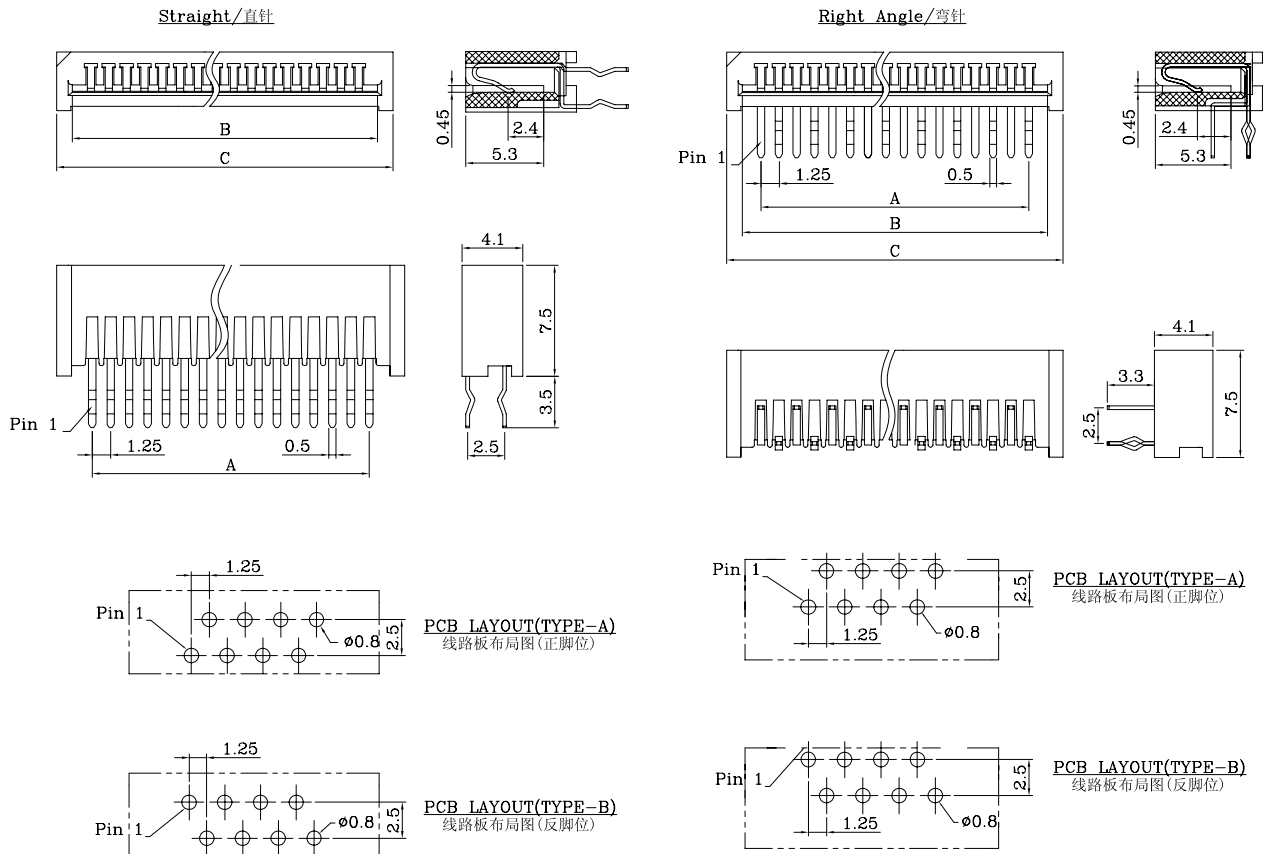


Ordering Code/订购型号:



- Series No./系列号: 6312
- Contact Type/接触类型:
S = Single Contact (单触)
- PCB Mount Type/安装类型:
S = Straight (直插)
R = Right Angle (弯插)

- Poles/位数:
04P ~ 40P
- PCB Mount Style/安装方式:
A = Type-A (正脚位)
B = Type-B (反脚位)



Applicable FFC
适用的FFC线