


Specifications/技术参数:

Electrical/电气特性:


Current Rating (额定电流): 0.5A
 Voltage Rating (额定电压): 50V
 Withstand Voltage (耐压值): 500VAC for one minute
 Contact Resistance (接触电阻): 30mΩ max
 Insulation Resistance (绝缘电阻): 500MΩ min
 Operating Temperature (工作温度): -25°C ~ +85°C

Physical/物理特性:

Insulator (塑胶本体): Nylon46
 Flammability Rating (防火等级): UL 94V-0
 Contacts (接触件): Phosphor Bronze
 Contacts plating (接触件电镀): Tin-plated

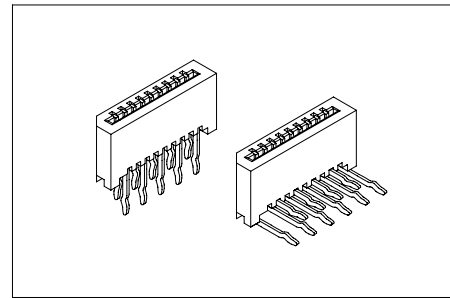

Dimension/尺寸: mm

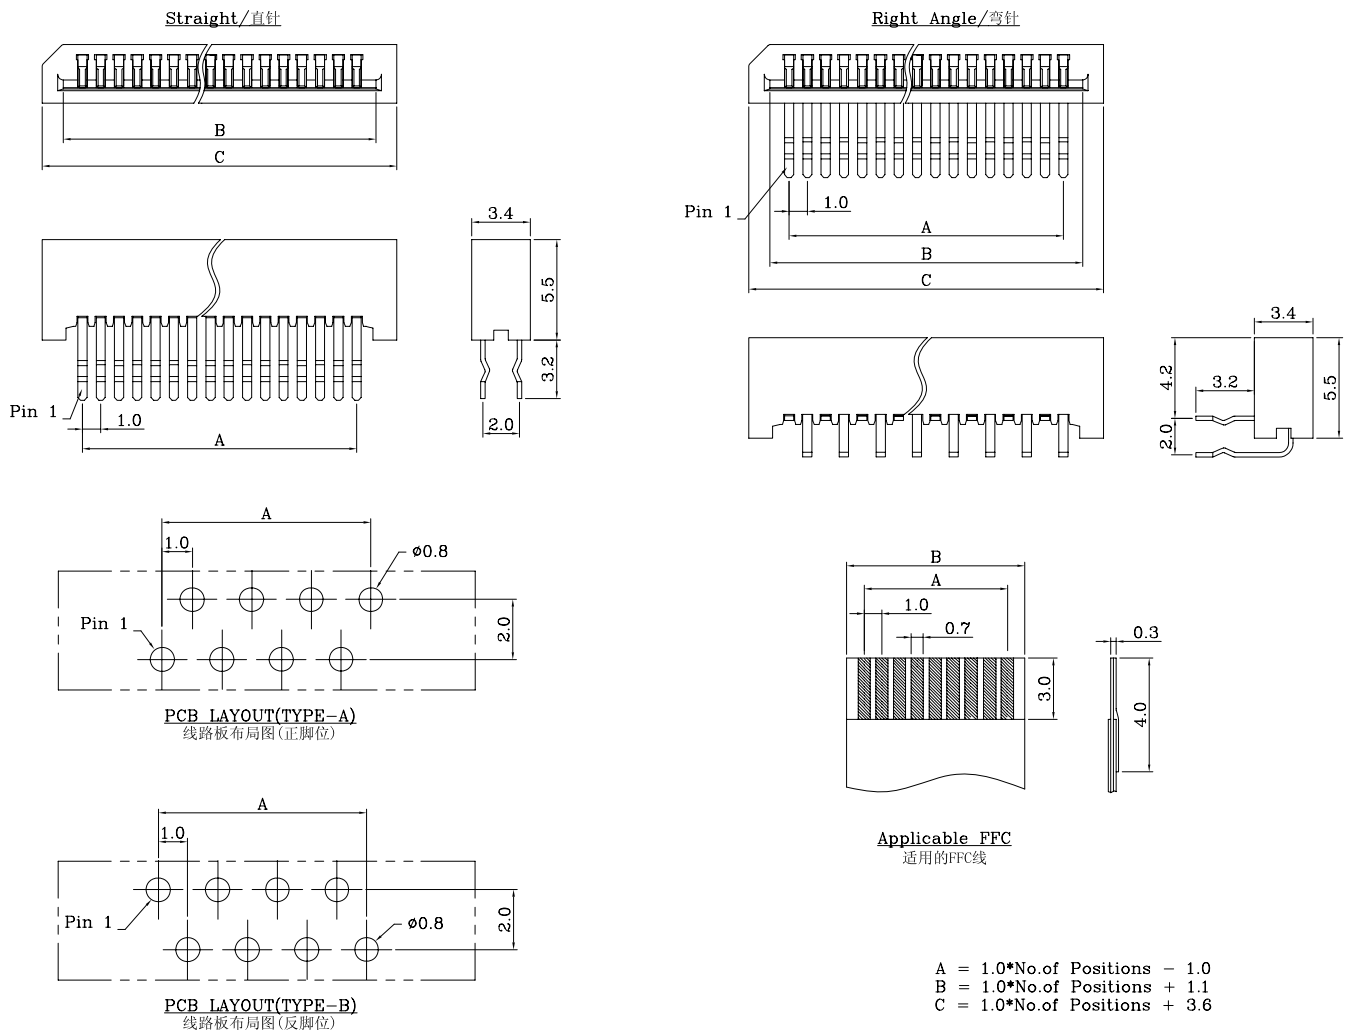

Ordering Code/订购型号:

1	2	3	4	5
6310	S	S	-	20P A

1. Series No./系列号: 6310
2. Contact Type/接触类型:
S = Single Contact (单触)
3. PCB Mount Type/安装类型:
S = Vertical DIP (直插)
R = Horizontal DIP (弯插)

4. Poles/位数:
04P ~ 40P
5. PCB Mount Style/安装方式:
A = Type-A (正脚位)
B = Type-B (反脚位)