

## Specifications/技术参数:

### Electrical/电气特性:



Current Rating(额定电流): 2A  
 Withstand Voltage(耐压值): AC 500V For 1minute  
 Contact Resistance(接触电阻): 20mΩ max  
 Insulation Resistance(绝缘电阻): 100MΩ min. at DC 500V  
 Operating Temperature(工作温度): -25°C ~ +70°C

### Physical/物理特性:


Insulator(塑胶本体): PBT  
 Flammability Rating(防火等级): UL 94V-0  
 Contacts(接触件): Copper Alloy  
 Shell(外壳): Brass or Steel



## Dimension/尺寸: mm

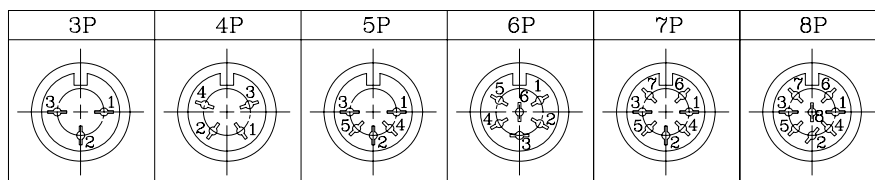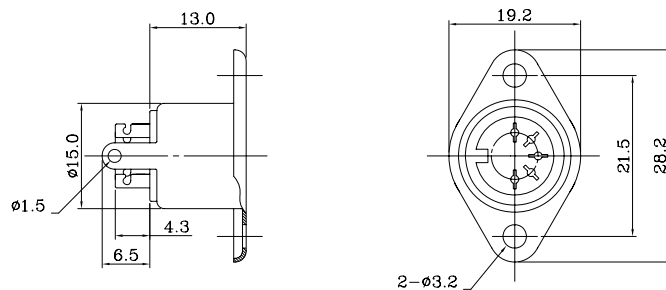

## Ordering Code/订购型号:



1. Series No./系列号: 1202S
2. Poles/位数: 3P, 4P, 5P, 6P, 7P, 8P
3. Mount type/安装类型: A = Solder(焊线型)
4. Shell/外壳材质: 1 = Brass(黄铜) ; 2 = Steel(钢铁)