

Specifications/技术参数:

Electrical/电气特性:

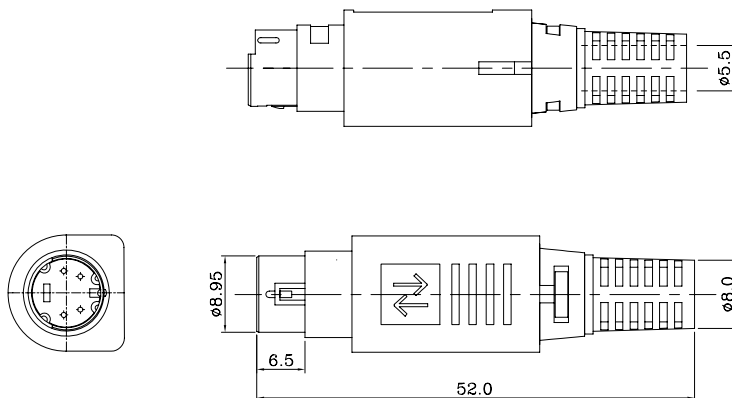
Current Rating(额定电流): DC 30V, 1.0A max
 Withstand Voltage(耐压值): AC 250V For 1minute
 Contact Resistance(接触电阻): 30mΩ max
 Insulation Resistance(绝缘电阻): 50MΩ min. at DC 250V
 Operating Temperature(工作温度): -25°C ~ +70°C







Physical/物理特性:

Body(内芯胶体): PBT +30% G.F UL94-V0
 Contacts(接触件): Brass, Gold Flash
 Housing(胶壳): ABS
 Lock Bottom Cover(底盖锁扣): Brass, Nickel Plated
 Lock Top Cover(顶盖锁扣): Brass, Nickel Plated
 Pom Ring(圆环): POM
 Spring(弹簧): Steel
 Inner Housing(内壳): PVC
 SR(尾卡): PVC



Dimension/尺寸: mm




3P	4P	5P	6P	7P	8P
					

Ordering Code/订购型号:


1 2 3 4
8301 - P A - 04P

1. Series No./系列号: 8301
2. Contact type/接触件类型: P = Plug(插头公针)
3. Housing type/壳体类型: A = Assembly(装配型)
4. Poles/位数: 3P, 4P, 5P, 6P, 7P, 8P

Body/内芯胶体:



Housing/胶壳:




Lock Bottom Cover/底盖锁扣:



Lock Top Cover/顶盖锁扣:




Pom Ring/POM环:



Spring/弹簧:



Inner Housing/内壳:



S R/尾卡:

