

8400 SERIES Full Shield Mini Din Jack PCB Type

Specifications/技术参数:

Electrical/电气特性:

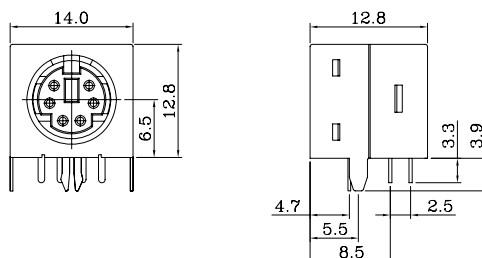
Current Rating(额定电流): DC 30V, 1.0A max
 Withstand Voltage(耐压值): AC 250V For 1minute
 Contact Resistance(接触电阻): 30mΩ max
 Insulation Resistance(绝缘电阻): 100MΩ min. at DC 500V
 Operating Temperature(工作温度): -25°C ~ +85°C













Physical/物理特性:

Insulator(塑胶本体): Thermoplastic Polyester Glass Filled
 Flammability Rating(防火等级): UL 94V-0
 Contacts(接触件): Copper Alloy
 Ground Lug(接地片): Copper Alloy



Dimension/尺寸: mm



3P	4P	5P	6P	7P	8P
					
					

Ordering Code/订购型号:

1 2 3 4

8400	FM	—	06	—	H
------	----	---	----	---	---

1. Series No./系列号: 8400
2. Insulator/胶体: FM = Fully shielded(全屏蔽)
3. Poles/位数: 3P, 4P, 5P, 6P, 7P, 8P
4. Mounting/安装配件: H = Hook metal(金属钩)